



STEP IN. STAND OUT.



CPT FLOORING (CUSTOM PRINTED TEXTURE FLOORING)

Our CPT Flooring is made of the thickest wear layer in the industry (75mil) and is available in Diamond Plate, Coin and also a Ceramic design. We start with a clear vinyl then apply a reverse print using the highest quality UV inks on the market (including white) then put a sealant on the back to protect the graphic. This process creates the most durable, long lasting printed surface available.

This unique floor is a fully reusable and recyclable. Being green is a big concern for our clients, so when the life cycle of the CPT flooring has come to and end, we will take the flooring back and have it re-ground and reused in new products. This is a truly eco-friendly floor.

CPT Flooring is great for:


- Retail
- Museums
- Trade Shows
- Events
- Point of Purchase
- Movie Theatres
- Hospitality
- Mobile Exhibits
- Trailers
- Casinos
- Swimming Pools

We developed this product to give designers a convenient way to have custom flooring options for their projects, **up to 10' wide.**

Below are 3 styles of CPT Flooring we offer:



Ceramic

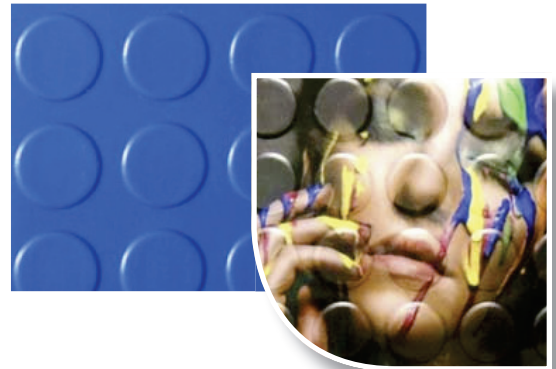

Raised Coin



Diamond Plated

The Inside Track 64 25th Street Atlanta Georgia 30309
888.806.7308 www.theinsidetrackinc.com



STEP IN. STAND OUT.



CPT - CUSTOM PRINTED TEXTURED FLOORING

- **Sizes Available:**

Each roll is 10 ft. wide and 50 ft. long

Thickness: 1/16" (75 mm)

*CPT Flooring can be printed and tiled to any size

- **Installation:**

1. Sweep and clean floor before rolling out product.

2. Unroll CPT on floor and allow it to relax and lay flat. Initially, edges may be curled due to being rolled on a core (this is normal).

3. Let flooring acclimate to surroundings.

4. For temporary installation, we recommend using double-sided carpet tape to the backside perimeter and seams of the CPT flooring. You must first apply clear box tape to backside of the CPT flooring wherever you will have double-sided carpet tape to ensure that the print will not be damaged during removal.

5. For permanent installation, a water base latex adhesive is recommended.

6. For large floors with more than one piece of CPT, edges may be butted together for a seamless appearance.

- **Fire Rating:**

Flame Resistant per ASTM International Test Method D2859

- **Coefficient Of Friction (COF) - Slip Resistance:**

The generally accepted standard is that a static anti-slip COF of 0.50 or above is safe on a dry walkway surface. A value below 0.50 indicates an unsafe walk way surface. Most codes recognize a static COF of 0.50 as legal and enforceable for slip resistant pedestrian walkways.

NOTE: The Americans with Disability Act Accessibility Guidelines indicate a minimum COF of 0.60 for level surfaces and 0.80 for ramps.

	DRY	WET
Ceramic Pattern	0.93	0.85
Coin Pattern	1.00	1.04
Diamond Plate	0.97	1.00

Data above represents overall averages

